

Features and Benefits

- Superior thermal performance
- 6.0W/m-K thermal conductivity
- Electrically isolating
- RoHS compliant
- Halogen-free



Typical Applications

- Notebook Computers
- Handheld Portable Electronics
- Micro Heat Pipe assemblies
- Micro Processors, Memory Chips and Graphic Processors
- Motor Control
- Wireless Communication Hardware

Optional Configurations

- Can be die-cut into other dimensions

The proprietary boron nitride formula of OP-8800 offers superior thermal performance with moderate compressibility.

This thermal conductive gap filler is electrically non-conductive and stable from -40~200°C. Its RoHS compliant and halogen-free status makes it an ideal gap filler for hazardous substance sensitive applications.


Properties	OP-8800 Series	Test Method
Construction & Composition	Boron nitride filled silicone elastomer	—
Color	Yellow	Visual
Thickness Range /inch (mm)	0.01"~0.40" (0.254~10.16) in 0.01" (0.254) increments	—
Standard Sheet Size	9" x 9"	—
Density /g.cm ⁻³	1.40	—
Hardness /Shore 00	70	ASTM D2240
Tensile Strength /psi	52	ASTM D412
UL Flammability Rating	UL94 HB	—
Temperature Range /°C	-40°C~200°C	—
Thermal Conductivity /W.m ⁻¹ .K ⁻¹	6.0	ASTM D5470 (modified)
Breakdown Voltage /V	>3000 (Thickness ≤ 0.02") >5000 (Thickness = 0.03~0.05") >6000 (Thickness ≥ 0.06")	ASTM D149
Volume Resistivity /ohm.cm	4.1 x 10 ¹³	ASTM D257
Dielectric Constant @ 1MHz	3.5	ASTM D150
Shelf Life /Months	24	—

Please contact us for other special requirements

Carrier Treatment	Criteria
Fiber Glass (FG)	Compulsory for ≤ 0.02" (0.5mm)
Rubberized Cloth (RC)	Not Recommended
Pressure Sensitive Adhesive (PSA)	Not Recommended
Detachable Adhesive (DA)	Not Recommended
Aluminum Foil (AL)	Not Recommended
Kapton (PI)	Not Recommended
Talc treatment (DAT)	Not Recommended

Product Code and Descriptions

OP 88 XX - XX - XX - XX - XX

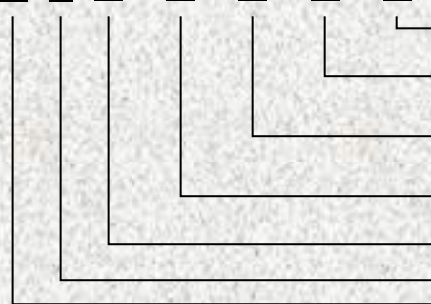

- Dimensions**
 SS = Standard sheet size
 CD = Custom dimensions
- Release Liner**
 ST = Standard
 OT = Other
- PSA**
 A1 = One side
 A2 = Both sides
 OT = Other
- Carrier**
 FG = Fiberglass
 OT = Other
- Thickness (mil)**
 00 = Custom thickness
 04 = 40mil
- 88 = 8800 Series**
OP = OpTIM™ gap filler

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1600 Lexington Ave., Suite 236A,
 Rochester, NY 14606, USA

SEM Belgium bvba

+32 59 560 270
 +32 59 560 271
 Slijpesteenweg 28,
 8432 Middelkerke (Leffinge),
 Belgium



SEM (Far East) Ltd.

+852 2686 9872
 +852 2686 9728
 Unit 3, 3/F, Blk A, New Trade Plaza,
 No. 6 On Ping St., Shatin, N.T.,
 Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686
 +86-769-8334 2028
 No.8 Qiaoxin Rd., Qiaotou Dongguan,
 Guangdong, China, 523525.

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.

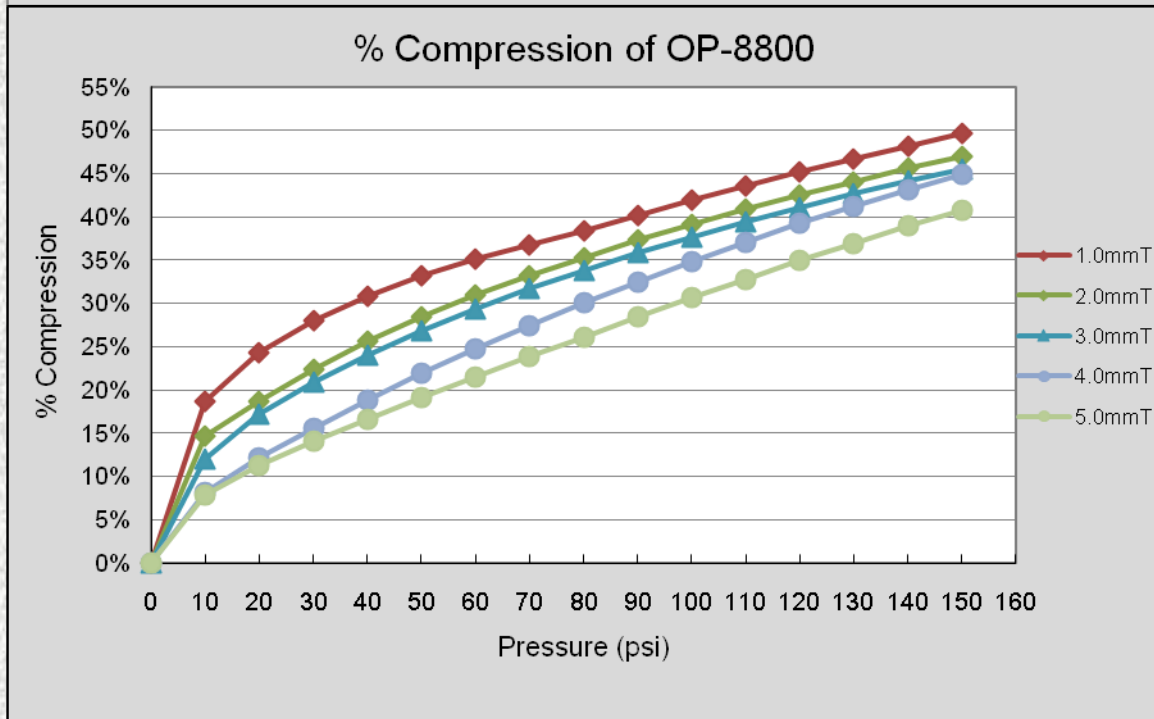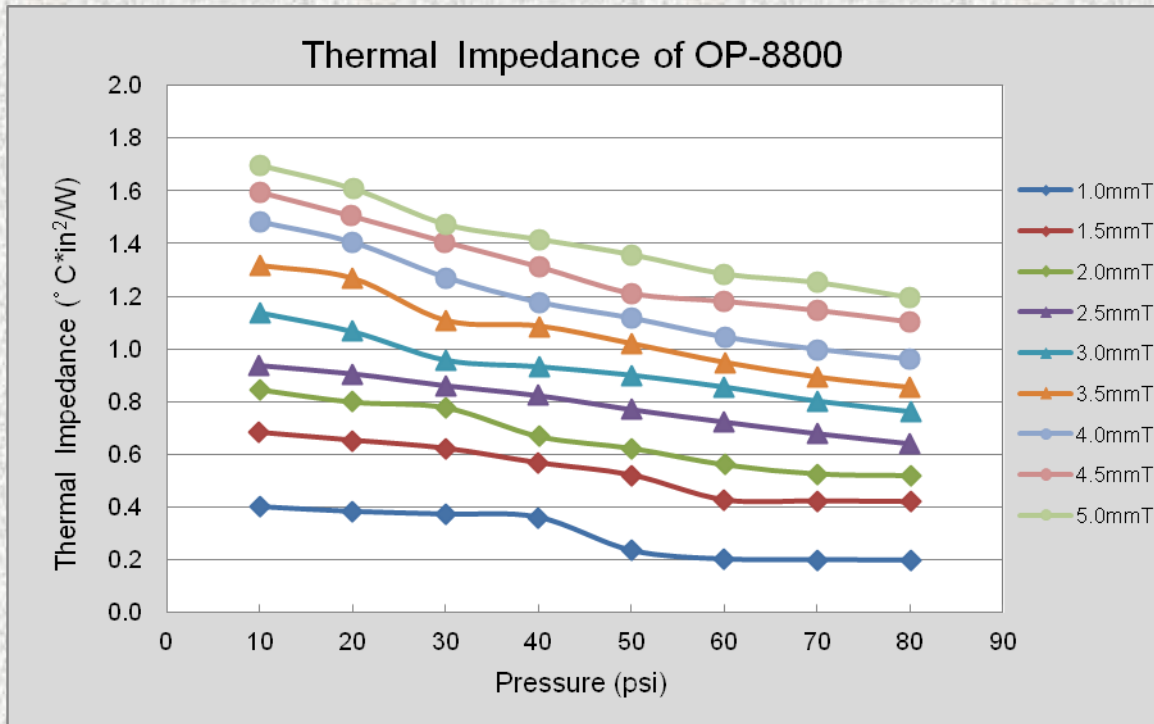

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1600 Lexington Ave., Suite 236A,
 Rochester, NY 14606, USA

SEM Belgium bvba

+32 59 560 270
 +32 59 560 271
 Slijpesteenweg 28,
 8432 Middelkerke (Leffinge),
 Belgium

SEM (Far East) Ltd.

+852 2686 9872
 +852 2686 9728
 Unit 3, 3/F, Blk A, New Trade Plaza,
 No. 6 On Ping St., Shatin, N.T.,
 Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686
 +86-769-8334 2028
 No.8 Qiaoxin Rd., Qiaotou Dongguan,
 Guangdong, China, 523525.

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.